


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 94.12 lm/W			
MORENO-LED-AURA-3-S8W-5CCT-BK		Imax (cd)	1193	S/MH(C0/180)	0.67
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	0.67
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	699.89	η UP,DN(C0-180)	0.4,46.9
NOMINAL FLUX(lm)	699.894	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.3,52.4
LAMPS INSIDE	1	η up (%)	0.7	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	η down (%)	99.3	CIBSE SHR MAX	0.70

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

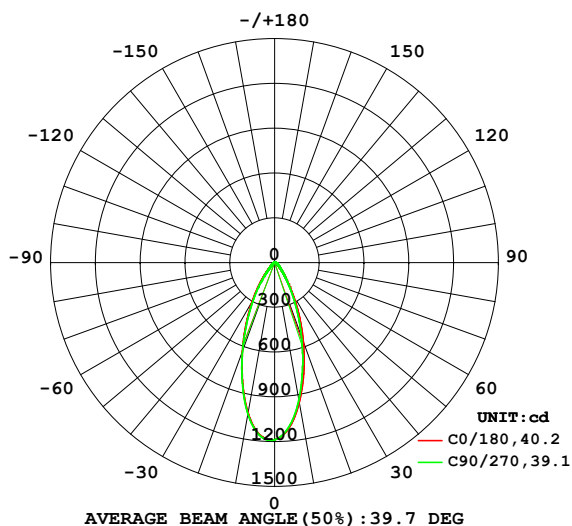

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

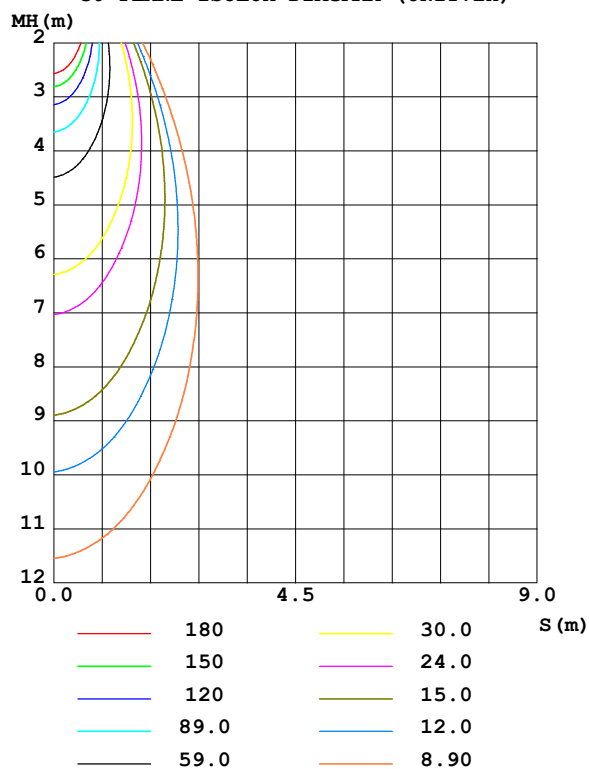

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	952.6	926.3	936.6	981.8	1024	1043	1032	1000	0- 10	103.5	103.5	14.8,14.8
20	564.8	527.8	528.9	582.9	633.8	644.9	630.0	612.4	10- 20	217.6	321.1	45.9,45.9
30	246.5	219.2	224.3	266.7	302.4	302.2	282.8	273.0	20- 30	188.2	509.3	72.8,72.8
40	72.93	69.28	72.81	87.26	102.6	106.6	90.08	81.11	30- 40	99.21	608.5	86.9,86.9
50	28.34	29.56	31.52	32.78	34.70	37.72	33.60	30.99	40- 50	39.26	647.7	92.5,92.5
60	17.66	18.33	19.28	18.91	19.67	21.00	20.28	18.85	50- 60	21.98	669.7	95.7,95.7
70	9.310	11.08	11.29	11.07	11.84	13.86	12.65	10.51	60- 70	15.07	684.8	97.8,97.8
80	3.234	2.660	3.947	4.133	4.606	6.623	5.137	3.995	70- 80	8.245	693.0	99,99
90	0.0984	0.2444	0.5620	0.1330	0.0875	0.0797	0.1590	0.0919	80- 90	1.761	694.8	99.3,99.3
100	0.1104	0.1161	0.1240	0.0974	0.0917	0.0847	0.0955	0.1230	90-100	0.1092	694.9	99.3,99.3
110	0.1800	0.1868	0.1860	0.1576	0.1455	0.1466	0.1626	0.1615	100-110	0.1386	695.0	99.3,99.3
120	0.3175	0.3286	0.3121	0.2645	0.2273	0.2326	0.2596	0.2677	110-120	0.2092	695.2	99.3,99.3
130	0.7265	0.7221	0.6796	0.6039	0.4962	0.4801	0.5276	0.5839	120-130	0.3638	695.6	99.4,99.4
140	1.634	1.591	1.517	1.370	1.186	1.103	1.206	1.345	130-140	0.7188	696.3	99.5,99.5
150	3.012	2.776	2.654	2.321	2.206	1.998	2.291	2.415	140-150	1.189	697.5	99.7,99.7
160	3.677	3.244	3.040	2.799	2.642	2.638	2.894	2.999	150-160	1.297	698.8	99.8,99.8
170	2.959	2.888	2.724	2.660	2.533	2.747	2.850	2.978	160-170	0.8305	699.6	100,100
180	2.594	2.747	2.513	2.772	2.593	2.744	2.508	2.769	170-180	0.2557	699.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2026-05-14

γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

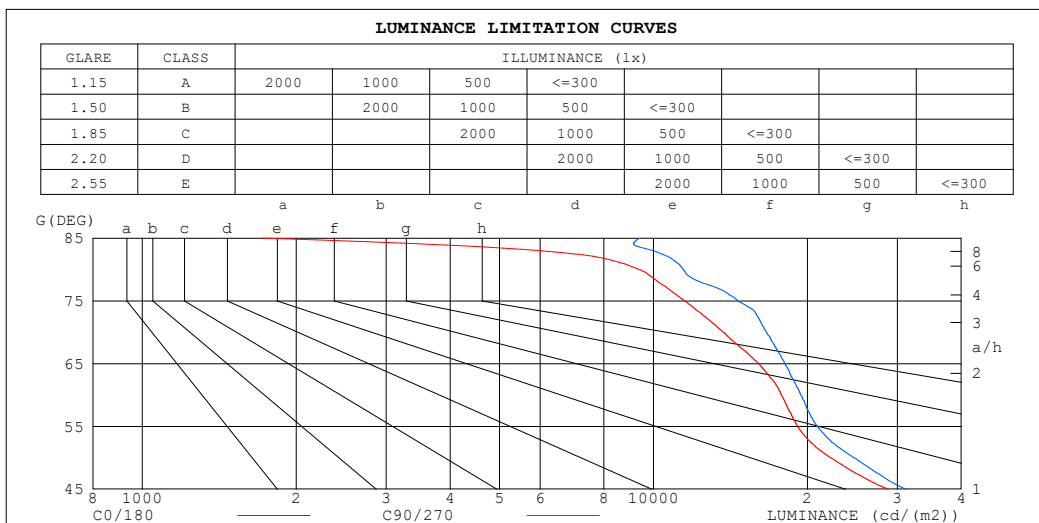

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1893	9550
80	9531	11573
75	11626	14788
70	13811	16739
65	16146	18187
60	17865	19519
55	19225	21019
50	22359	24832
45	29106	31449

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2026-05-14


γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.05	1.08	1.06	1.03	1.04	1.02	1.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.98	.95	1.00	.97	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.89	.85	.83	.86	.84	.81	.80
4.0	.89	.84	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.79	.76	.74
5.0	.84	.78	.74	.83	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.73	.68	.64	.71	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.59
9.0	.67	.61	.58	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.55	.64	.58	.55	.63	.58	.54	.62	.57	.54	.61	.57	.54	.53

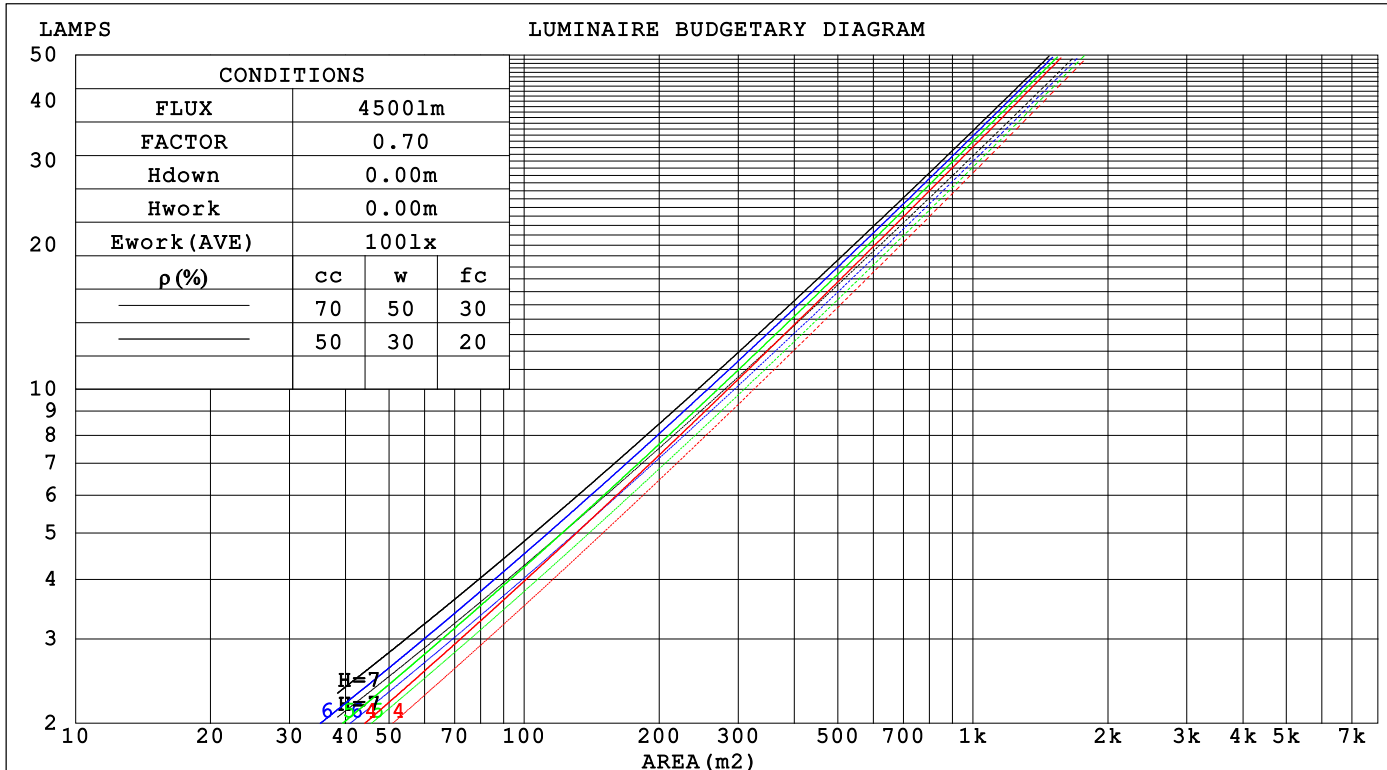

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.186	.106	.034	.179	.102	.033	.166	.095	.030	.154	.089	.029	.143	.083	.027		
2.0	.177	.097	.030	.171	.094	.029	.160	.089	.028	.150	.084	.026	.140	.079	.025		
3.0	.167	.089	.027	.162	.087	.026	.152	.082	.025	.143	.079	.024	.135	.075	.023		
4.0	.157	.082	.024	.153	.080	.024	.145	.077	.023	.137	.074	.022	.130	.071	.021		
5.0	.148	.076	.022	.145	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020		
6.0	.141	.070	.020	.137	.069	.020	.131	.067	.020	.125	.065	.019	.120	.063	.019		
7.0	.133	.066	.019	.130	.065	.019	.125	.063	.018	.120	.061	.018	.115	.060	.018		
8.0	.127	.062	.017	.124	.061	.017	.119	.060	.017	.115	.058	.017	.110	.057	.016		
9.0	.121	.059	.016	.119	.058	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016		
10.0	.116	.055	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.102	.051	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.177	.163	.150	.152	.140	.129	.104	.096	.089	.060	.056	.052	.019	.018	.017		
2.0	.163	.138	.118	.139	.119	.102	.095	.082	.071	.055	.048	.042	.018	.015	.014		
3.0	.150	.119	.095	.129	.103	.082	.088	.071	.058	.051	.042	.034	.016	.014	.011		
4.0	.140	.105	.078	.120	.090	.068	.083	.063	.048	.048	.037	.028	.015	.012	.009		
5.0	.131	.093	.065	.112	.081	.057	.077	.056	.040	.045	.033	.024	.014	.011	.008		
6.0	.123	.084	.055	.106	.073	.048	.073	.051	.034	.042	.030	.020	.014	.010	.007		
7.0	.116	.076	.048	.100	.066	.042	.069	.046	.030	.040	.027	.018	.013	.009	.006		
8.0	.110	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.015	.012	.008	.005		
9.0	.105	.065	.037	.091	.056	.032	.063	.039	.023	.037	.023	.014	.012	.008	.005		
10.0	.100	.060	.033	.087	.052	.029	.060	.037	.021	.035	.022	.012	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm										
NAME: RENO-LED-AURA-3-S8W-5CCT-BK						TYPE:			WEIGHT:	
SPEC.: 3000K						DIM.:			SERIAL No.:	
MFR.: RENO						SUR.:			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.5	20.4	19.7	20.6	20.8	19.6	20.5	19.8	20.7	20.9
3H	20.0	20.9	20.3	21.1	21.3	20.4	21.3	20.7	21.5	21.7
4H	20.2	21.1	20.5	21.3	21.5	20.7	21.5	21.0	21.8	22.0
6H	20.4	21.1	20.7	21.4	21.7	20.9	21.6	21.2	21.9	22.2
8H	20.4	21.1	20.7	21.4	21.7	20.9	21.6	21.2	21.9	22.2
12H	20.3	21.1	20.7	21.3	21.6	20.9	21.6	21.2	21.9	22.2
4H 2H	19.7	20.5	20.0	20.7	21.0	19.8	20.6	20.1	20.9	21.1
3H	20.5	21.2	20.8	21.5	21.8	20.8	21.6	21.2	21.8	22.1
4H	20.8	21.4	21.1	21.7	22.1	21.2	21.9	21.6	22.2	22.5
6H	21.0	21.5	21.4	21.9	22.3	21.4	22.0	21.8	22.4	22.7
8H	21.0	21.5	21.4	21.9	22.3	21.5	22.0	21.9	22.4	22.8
12H	21.0	21.5	21.4	21.8	22.3	21.6	22.0	22.0	22.4	22.8
8H 4H	20.9	21.4	21.3	21.8	22.2	21.3	21.8	21.7	22.2	22.6
6H	21.1	21.6	21.6	22.0	22.4	21.6	22.0	22.0	22.4	22.8
8H	21.2	21.6	21.7	22.0	22.5	21.7	22.1	22.1	22.5	23.0
12H	21.2	21.5	21.7	22.0	22.5	21.8	22.1	22.3	22.6	23.1
12H 4H	20.9	21.3	21.3	21.7	22.1	21.3	21.8	21.7	22.1	22.6
6H	21.1	21.5	21.6	21.9	22.4	21.5	21.9	22.0	22.3	22.8
8H	21.2	21.5	21.7	22.0	22.5	21.7	22.0	22.1	22.4	22.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.1 / - 1.1					+ 0.8 / - 0.9				
1.5H	+ 2.1 / - 0.9					+ 1.6 / - 0.7				
2.0H	+ 0.8 / - 0.5					+ 0.9 / - 0.5				

CIE Pub.117, 699.9 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.2)
 Area: 0.00198412 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2026-05-14

γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	72	83	76	72	82	76	72	68
0.80	91	85	80	90	84	80	89	84	80	76
1.00	96	90	86	95	89	85	93	89	85	80
1.25	100	95	91	99	94	90	97	93	89	85
1.50	103	98	94	102	97	94	100	96	93	88
2.00	107	102	98	105	101	97	102	99	96	90
2.50	109	104	101	107	103	100	104	100	98	92
3.00	110	107	103	108	105	102	105	102	100	93
4.00	113	110	107	111	108	106	107	105	103	95
5.00	114	111	109	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2026-05-14

γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

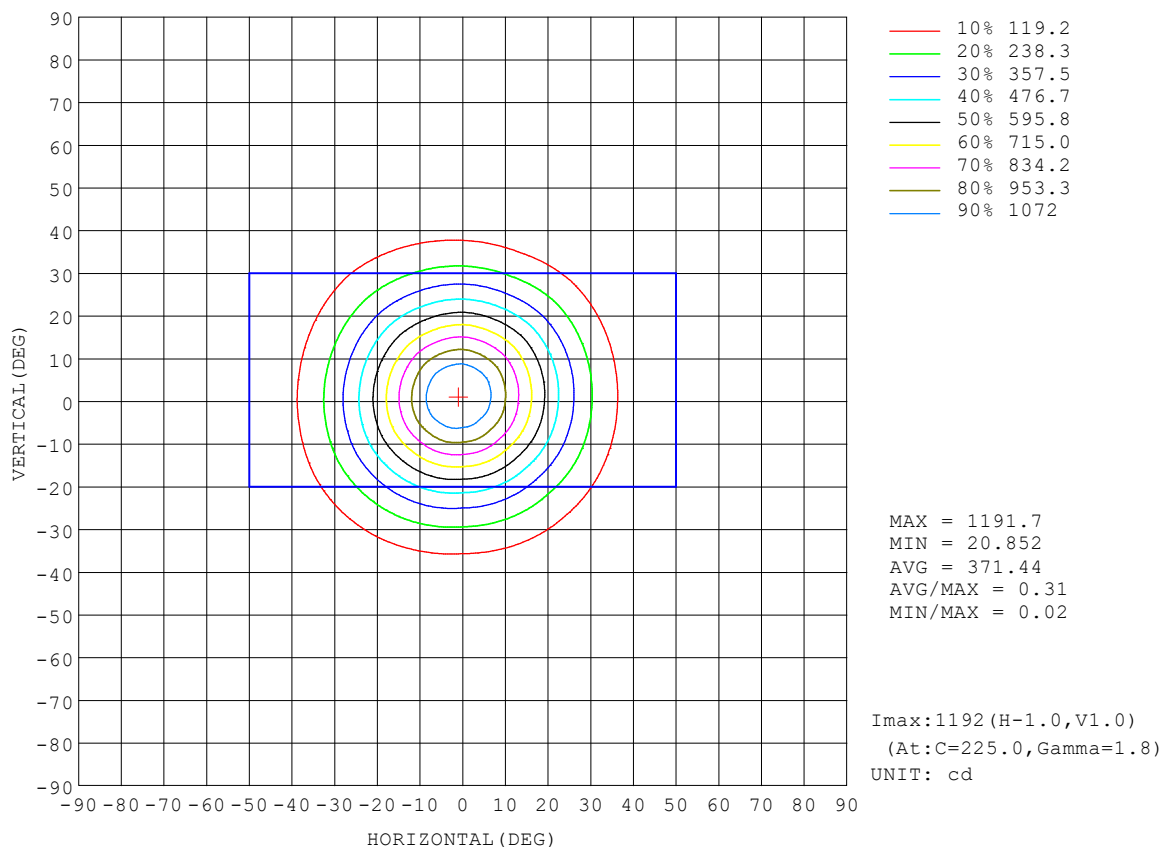


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

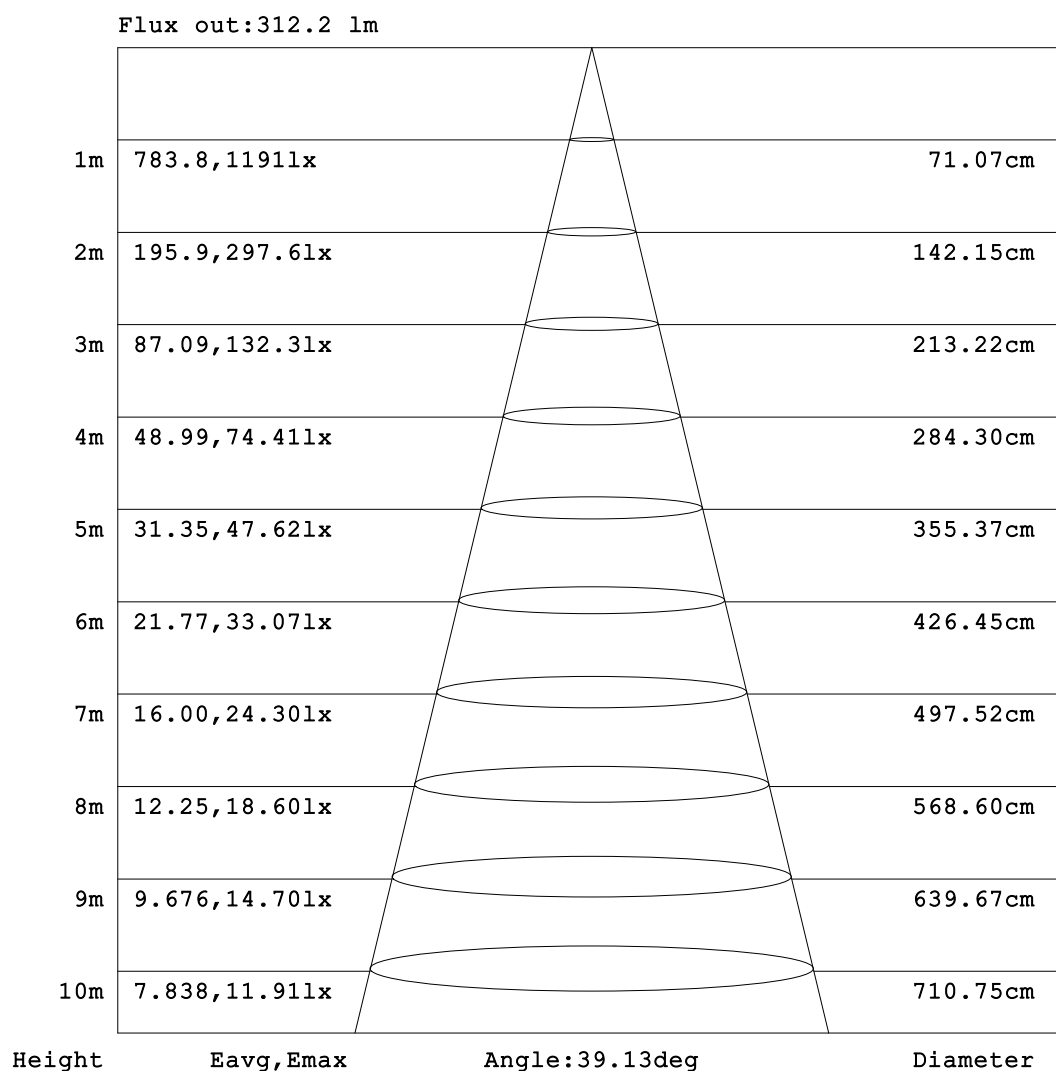

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

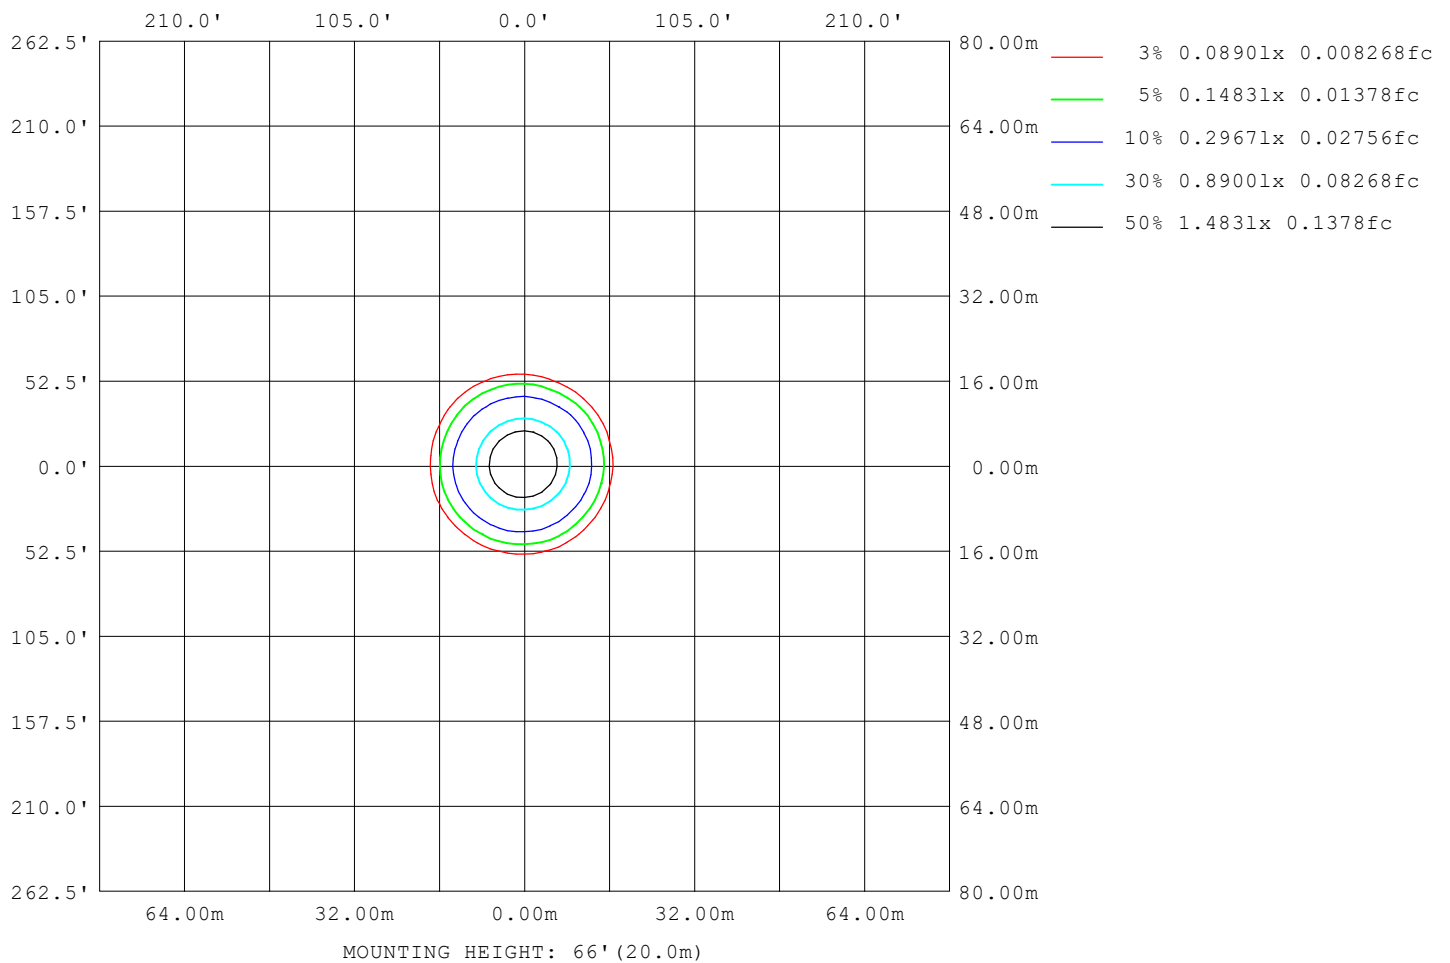

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17345
L_0~180 (75) av	13948
L_0~180 (85) av	3499
L_90~270 (65) av	18959
L_90~270 (75) av	16199
L_90~270 (85) av	9381
L_45 (65) av	18272
L_45 (75) av	15637
L_45 (85) av	6849

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

Planar Illuminance Curve

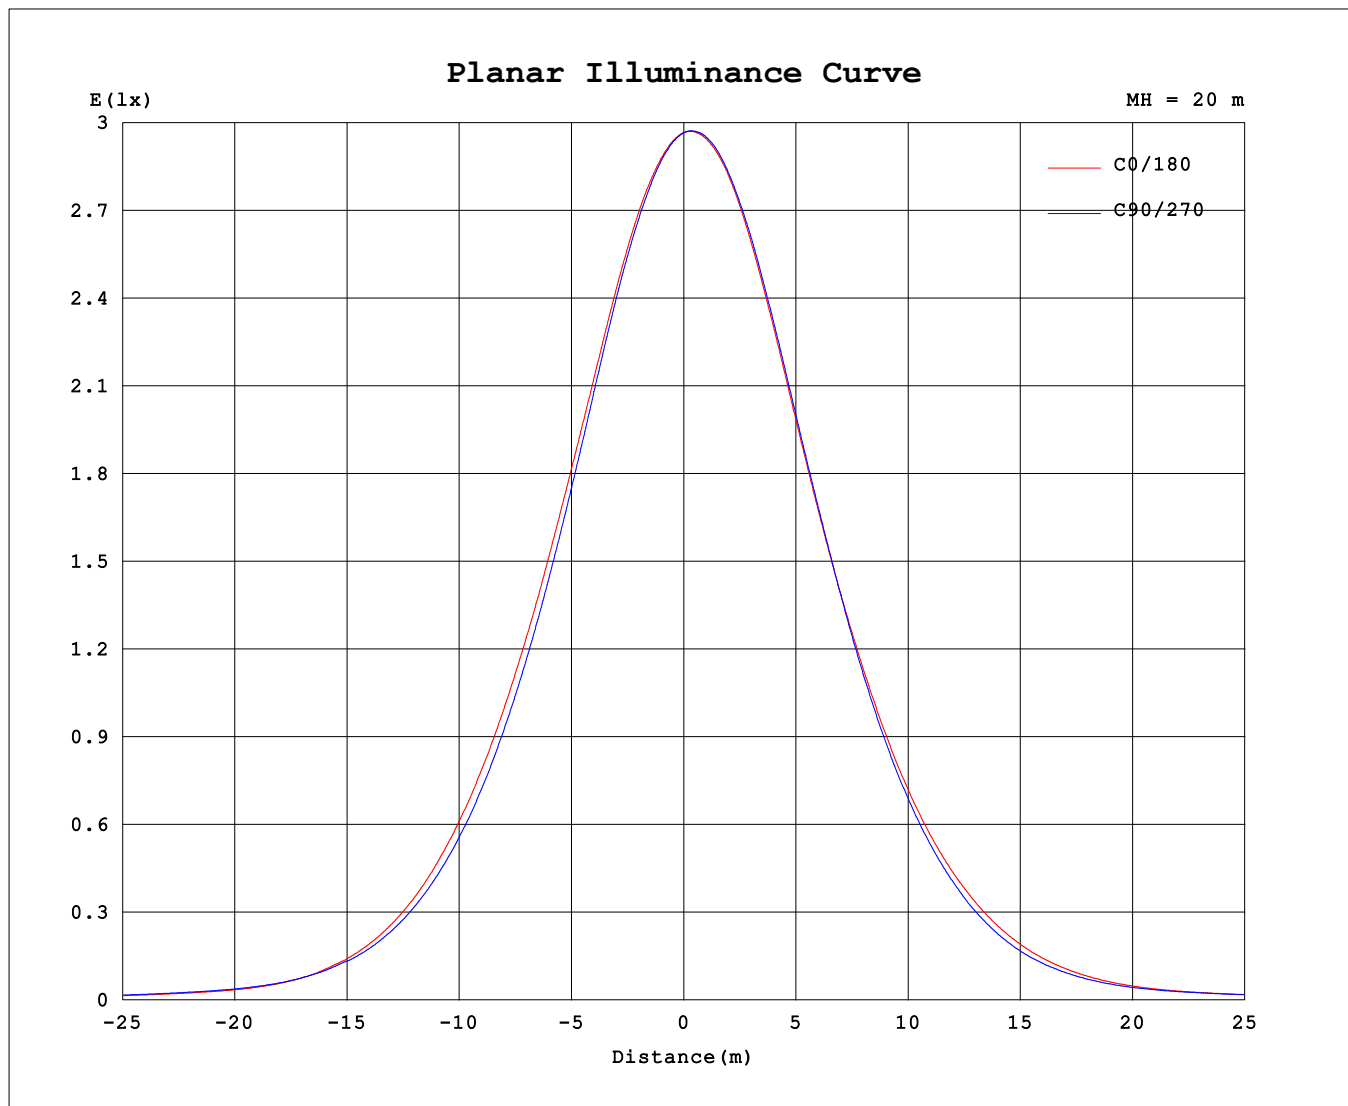

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2026-05-14

γ Range: 0 - 180DEG
 γ Interval: 0.1DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.26V I:0.0644A P:7.4360W PF:0.9595 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:699.894x1 lm		
NAME: RENO-LED-AURA-3-S8W-5CCT-BK	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: RENO	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187	1187			
5	1115	1108	1099	1104	1108	1123	1134	1149	1159	1165	1170	1166	1163	1150	1142	1126			
10	957	945	930	936	941	966	984	1012	1028	1035	1047	1038	1035	1017	1004	976			
15	762	747	728	729	732	757	781	815	835	843	855	844	841	825	814	784			
20	569	552	532	530	533	560	586	621	637	643	649	636	634	620	616	591			
25	394	378	358	357	361	387	413	443	457	460	462	447	442	430	431	412			
30	249	238	222	223	227	247	269	294	305	305	305	292	285	273	276	262			
35	142	134	127	129	131	144	159	178	187	186	187	175	167	155	159	150			
40	73.9	70.8	70.1	72.4	73.6	79.2	88.4	98.7	104	104	108	100	91.2	82.6	82.4	78.4			
45	40.8	41.1	41.8	43.8	44.1	45.3	48.8	53.4	55.7	57.8	60.9	56.1	50.3	44.7	44.3	41.7			
50	28.5	29.1	29.7	31.3	31.7	31.7	33.0	34.4	34.9	36.4	38.0	37.1	33.8	30.7	31.2	29.1			
55	21.9	22.2	22.9	23.7	23.9	23.6	24.2	25.1	25.6	26.5	27.2	26.5	24.9	23.1	23.3	22.0			
60	17.7	17.7	18.4	19.2	19.4	18.5	19.0	19.5	19.8	20.5	21.0	20.9	20.3	19.0	18.9	17.9			
65	13.5	13.8	14.8	15.4	15.3	14.6	14.9	15.4	15.7	16.4	17.0	17.0	16.7	15.4	14.8	13.9			
70	9.37	9.96	11.2	12.0	11.4	10.9	11.1	11.5	11.9	12.8	13.9	13.9	12.7	11.4	10.6	9.63			
75	5.97	6.44	7.20	6.89	7.60	7.56	7.82	8.18	8.48	9.41	10.4	10.3	9.19	7.72	7.02	6.12			
80	3.28	3.45	2.73	3.02	3.99	2.42	4.24	4.92	4.68	5.66	6.69	6.53	5.21	4.12	4.05	3.40			
85	0.33	0.59	0.57	2.12	1.65	0.37	0.37	1.47	0.98	1.58	2.48	3.08	1.67	1.22	1.49	0.84			
90	0.10	0.13	0.25	0.65	0.61	0.22	0.13	0.09	0.09	0.07	0.08	0.19	0.21	0.10	0.10	0.08			
95	0.09	0.09	0.09	0.16	0.13	0.15	0.09	0.07	0.08	0.07	0.07	0.07	0.07	0.07	0.09	0.08			
100	0.11	0.12	0.12	0.12	0.13	0.11	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.12	0.10			
105	0.14	0.15	0.16	0.15	0.14	0.13	0.13	0.12	0.11	0.11	0.12	0.12	0.13	0.12	0.13	0.13			
110	0.18	0.18	0.18	0.18	0.19	0.16	0.16	0.15	0.15	0.14	0.14	0.15	0.16	0.16	0.16	0.16			
115	0.23	0.24	0.24	0.23	0.23	0.21	0.20	0.19	0.18	0.18	0.18	0.19	0.20	0.20	0.20	0.20			
120	0.32	0.32	0.33	0.32	0.31	0.28	0.27	0.26	0.23	0.23	0.23	0.24	0.26	0.26	0.26	0.27			
125	0.47	0.47	0.47	0.46	0.44	0.40	0.39	0.37	0.32	0.32	0.32	0.33	0.35	0.36	0.38	0.40			
130	0.72	0.72	0.72	0.69	0.67	0.62	0.60	0.57	0.49	0.48	0.48	0.49	0.52	0.55	0.58	0.62			
135	1.10	1.09	1.08	1.04	1.02	0.95	0.92	0.89	0.77	0.75	0.73	0.74	0.79	0.83	0.89	0.95			
140	1.62	1.61	1.58	1.51	1.51	1.41	1.36	1.33	1.18	1.14	1.10	1.12	1.19	1.26	1.33	1.43			
145	2.28	2.26	2.20	2.07	2.09	1.95	1.85	1.86	1.71	1.66	1.55	1.61	1.72	1.79	1.87	2.02			
150	3.00	2.96	2.76	2.60	2.64	2.46	2.31	2.33	2.20	2.12	1.99	2.12	2.28	2.34	2.41	2.69			
155	3.60	3.52	3.15	2.95	2.97	2.80	2.64	2.70	2.54	2.49	2.38	2.54	2.70	2.76	2.83	3.18			
160	3.68	3.58	3.25	3.07	3.04	2.90	2.80	2.78	2.64	2.64	2.63	2.76	2.89	2.97	3.00	3.36			
165	3.43	3.36	3.08	2.97	2.87	2.83	2.77	2.73	2.62	2.66	2.80	2.81	2.89	2.94	2.94	3.26			
170	2.97	2.89	2.89	2.78	2.72	2.74	2.67	2.55	2.53	2.55	2.75	2.88	2.85	2.86	2.98	2.93			
175	2.78	2.82	2.75	2.54	2.48	2.55	2.61	2.40	2.36	2.38	2.64	2.74	2.64	2.62	2.79	2.80			
180	2.60	2.57	2.75	2.60	2.51	2.53	2.77	2.61	2.59	2.57	2.74	2.61	2.51	2.54	2.76	2.62			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2026-05-14

γ Range: 0 - 180DEG
γ Interval: 0.1DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks: